


SUPER MAT STC

with Silicone Top Coating

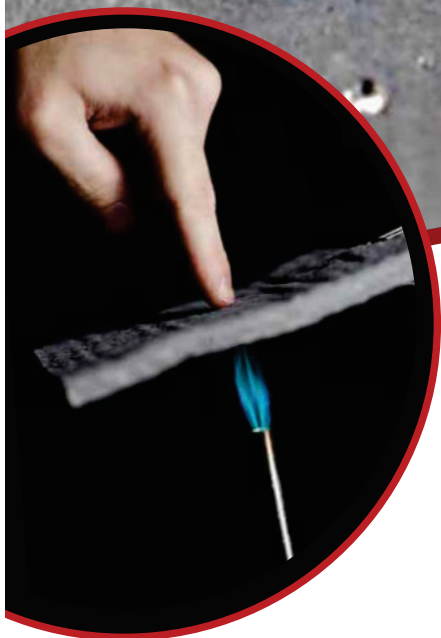

Product Description

- 8mm SuperMat with Silicone Top Coat (STC)
- Suitable as an Alternative to Metal Jacketing
- Can Be Used As Jacketing on Competitive Insulations
- CUI Mitigation: Hydrophobic and Breathable.
- Achieve Personal Protection With One Layer
- Durable and Reusable
- Dust-Free For A Safe Environment
- Good Solution For Small Bore Piping
- Easy to Cut and Fabricate
- Non-Combustible, Fire Resistant, and Non-Corrosive.

Physical Properties

Color	Grey
Density	144 to 192 kg/m ³ (9 to 12 lb/ft ³)
Thickness	8 mm (0.3 in),
Maximum Use Temp	1200F/650C
Hydrophobic	Continuously Hydrophobic
Width	8 mm thick: 5 cm (2 in) to 182 cm (72 in)

Material Performance Data*

Test Method	Performance	Value
ASTM C356	Linear Shrinkage Under Soaking Heat	<2% @ 649°C
ASTM C795	Corrosiveness over Austenitic SS	Passed
ASTM C1101	Classifying Flexibility	Resilient Flexibility
ASTM C1104	Water Vapor Sorption	<1% (by wt)
ASTM C1338	Fungi Resistance	Passed
ASTM C1763	Water Absorption by Immersion	Procedure B, <5%
ASTM C1511	Liquid Water Retention Post-submersion, after heat aging per test method	<5%
ASTM E84	Surface Burning Characteristics	FSI=5 ; SDI=75

* Third party test reports available upon request

Blanket Thickness (mm)	Roll Length Meter (ft)
8	~38.1 (125)
16	~22.8 (75)
20	~18.3 (60)
25	~13.7 (45)



Thermal Performance per ASTM C177*

Temperature (°C)	0	100	200	300	400	500	600
Thermal Conductivity (mW/mK)	32.5	43.4	55.7	71.2	85.2	102.5	133.4
Temperature (°F)	32	212	392	572	750	932	1112
Thermal Conductivity (Btu-in/hr-ft ² ·°F)	0.23	0.30	0.39	0.49	0.59	0.71	0.93

* Third party test reports available upon request

CAUTION: Lewco Super Mat is not recommended for INDOOR applications to equipment which will operate above 600°F (315°C).

This information is given in good faith and is believed to be accurate. No expressed or implied warranty of any kind including those of merchantability or fitness for a particular purpose is made as to the performance of an installation. Super Insulation, LLC does not take any responsibility for misuse of these products and recommends testing before use.

6859 Renoir Avenue
Baton Rouge, LA 70806



Fax: (225) 927-2918
Tel: (225) 924-3221

Rev. 7
10 July, 2020